

Conduits

Steel EMT Conduit



Materials:
Hot dip Gavanized Steel
Standards:
UL797
Certification:
UL & CUL

Part No.	Size	Nominal Wt. (kg)	Nominal Outside Diameter (mm)	Thickness (mm)	Length (mm)
EMT050HG	1/2"	1.35	17.93	1.07	3050
EMT075HG	3/4"	2.07	23.42	1.25	3050
EMT100HG	1"	3.06	29.54	1.45	3050
EMT125HG	1-1/4"	4.56	38.35	1.65	3050
EMT150HG	1-1/2"	5.28	44.2	1.65	3050
EMT200HG	2"	6.72	55.8	1.65	3050
EMT250HG	2-1/2"	9.79	73.03	1.83	3050
EMT300HG	3"	12.00	88.9	1.83	3050
EMT350HG	3-1/2"	15.80	101.6	2.11	3050
EMT400HG	4"	17.80	114.3	2.11	3050

Steel EMT Conduit



Materials:
Pre Gavanized Steel
Standards:
UL797

Part No.	Size	Nominal Wt. (kg)	Nominal Outside Diameter (mm)	Thickness (mm)	Length (mm)
EMT050PG	1/2"	1.35	17.93	1.07	3050
EMT075PG	3/4"	2.07	23.42	1.25	3050
EMT100PG	1"	3.06	29.54	1.45	3050
EMT125PG	1-1/4"	4.56	38.35	1.65	3050
EMT150PG	1-1/2"	5.28	44.2	1.65	3050
EMT200PG	2"	6.72	55.8	1.65	3050
EMT250PG	2-1/2"	9.79	73.03	1.83	3050
EMT300PG	3"	12.00	88.9	1.83	3050
EMT350PG	3-1/2"	15.80	101.6	2.11	3050
EMT400PG	4"	17.80	114.3	2.11	3050

Steel EMT Elbows



Use:

90° EMT elbows are used to connect steel EMT Conduit together to allow for 90° bends

Materials:

Hot Dip Galvanized Steel

Certification:


UL/CUL

Other degrees:

22.5°;30°;60° available

90° EMT Elbow

Part No.	Size
EMT-9050EL	1/2"
EMT-9075EL	3/4"
EMT-9100EL	1"
EMT-9125EL	1-1/4"
EMT-9150EL	1-1/2"
EMT-9200EL	2"
EMT-9250EL	2-1/2"
EMT-9300EL	3"
EMT-9350EL	3-1/2"
EMT-9400EL	4"

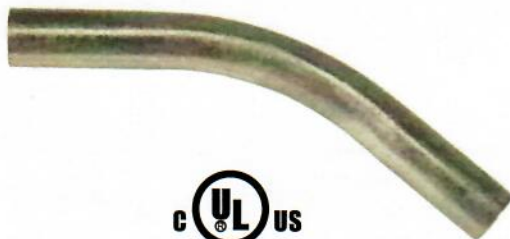

Use:

45° EMT elbows are used to connect steel EMT Conduit together to allow for 45° bends

Materials:

Hot Dip Galvanized Steel

Certification:

UL/CUL

Other degrees:

22.5°;30°;60° available

45° EMT Elbow

Part No.	Size
EMT-4050EL	1/2"
EMT-4075EL	3/4"
EMT-4100EL	1"
EMT-4125EL	1-1/4"
EMT-4150EL	1-1/2"
EMT-4200EL	2"
EMT-4250EL	2-1/2"
EMT-4300EL	3"
EMT-4350EL	3-1/2"
EMT-4400EL	4"

Zinc Die Cast Fittings



Use:

Set screw type connectors are used to secure and terminate steel EMT conduit to knock-outs in concrete-tight box or dry location applications.

Materials :

Zinc Die-Cast
Aluminum die cast

Standards :

UL 514B
CSA C22.2 No. 18

Certification:

UL/CUL

EMT Connector

Part No.	Part No.	Size
SCON-050	AEC-050	1/2"
SCON-075	AEC-075	3/4"
SCON-100	AEC-100	1"
SCON-125	AEC-125	1-1/4"
SCON-150	AEC-150	1-1/2"
SCON-200	AEC-200	2"
SCON-250	AEC-250	2-1/2"
SCON-300	AEC-300	3"
SCON-350	AEC-350	3-1/2"
SCON-400	AEC-400	4"



Use:

Set screw type couplings are used to join lengths of steel EMT conduit for concrete-tight or dry location applications.

Materials :

Zinc Die-Cast
Aluminum die cast

Standards :

UL 514B
CSA C22.2 No. 18

Certification:

UL/CUL

EMT Coupling

Part No.	Part No.	Size
SCOP-050	AECP-050	1/2"
SCOP-075	AECP-075	3/4"
SCOP-100	AECP-100	1"
SCOP-125	AECP-125	1-1/4"
SCOP-150	AECP-150	1-1/2"
SCOP-200	AECP-200	2"
SCOP-250	AECP-250	2-1/2"
SCOP-300	AECP-300	3"
SCOP-350	AECP-350	3-1/2"
SCOP-400	AECP-400	4"

Zinc Die Cast Fittings



EMT Compression Connector

Use:

Compression type connectors are used to join two lengths of threadless Rigid or IMC Conduit.

Materials :

Zinc

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

Part No.	Size
CCON-050	1/2"
CCON-075	3/4"
CCON-100	1"
CCON-125	1-1/4"
CCON-150	1-1/2"
CCON-200	2"



EMT Compression Coupling

Use:

Compression type couplings are used to join two lengths of threadless Rigid or IMC Conduit.

Materials :

Zinc

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

Part No.	Size
CCOP-050	1/2"
CCOP-075	3/4"
CCOP-100	1"
CCOP-125	1-1/4"
CCOP-150	1-1/2"
CCOP-200	2"

Steel Fittings



Use:

Set screw type connectors are used to secure and terminate steel EMT conduit to knock-outs in concrete-tight box or dry location applications.

UL Listed Locknut
Concrete-Tight

Materials :

Steel

Standards :

UL 514B
CSA C22.2 No. 18

Certification:

UL/CUL

EMT Set Screw Connector

Part No.	Size
SSC-050	1/2"
SSC-075	3/4"
SSC-100	1"
SSC-125	1-1/4"
SSC-150	1-1/2"
SSC-200	2"
SSC-250	2-1/2"
SSC-300	3"
SSC-350	3-1/2"
SSC-400	4"

EMT Insulated Set Screw Connector

Part No.	Size
SSCI-050	1/2"
SSCI-075	3/4"
SSCI-100	1"
SSCI-125	1-1/4"
SSCI-150	1-1/2"
SSCI-200	2"
SSCI-250	2-1/2"
SSCI-300	3"
SSCI-350	3-1/2"
SSCI-400	4"



Use:

Compression type couplings are used to join two EMT conduits
Concrete-Tight

Materials :

Steel

Standards :

UL 514B
CSA C22.2 No. 18

Certification:

UL/CUL

EMT Set Screw Coupling

Part No.	Size
SSCP-050	1/2"
SSCP-075	3/4"
SSCP-100	1"
SSCP-125	1-1/4"
SSCP-150	1-1/2"
SSCP-200	2"
SSCP-250	2-1/2"
SSCP-300	3"
SSCP-350	3-1/2"
SSCP-400	4"

Steel Fittings



EMT Compression Connector

Part No.	Size
SCC-050	1/2"
SCC-075	3/4"
SCC-100	1"
SCC-125	1-1/4"
SCC-150	1-1/2"
SCC-200	2"
SCC-250	2-1/2"
SCC-300	3"
SCC-350	3-1/2"
SCC-400	4"

Use:

Compression type connectors are used to join two lengths of threadless Rigid or IMC Conduit.

Concrete-Tight

Materials :

Steel

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

EMT Insulated Compression Connector

Part No.	Size
SCCI-050	1/2"
SCCI-075	3/4"
SCCI-100	1"
SCCI-125	1-1/4"
SCCI-150	1-1/2"
SCCI-200	2"
SCCI-250	2-1/2"
SCCI-300	3"
SCCI-350	3-1/2"
SCCI-400	4"



Use:

Compression type couplings are used to join two lengths of threadless Rigid or IMC Conduit.

Concrete-Tight

Materials :

Steel

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

EMT Compression Coupling

Part No.	Size
SCCP-050	1/2"
SCCP-075	3/4"
SCCP-100	1"
SCCP-125	1-1/4"
SCCP-150	1-1/2"
SCCP-200	2"
SCCP-250	2-1/2"
SCCP-300	3"
SCCP-350	3-1/2"
SCCP-400	4"



Rain Tight Compression Connector

Use:

Compression type connectors are used to secure and terminate steel EMT conduit to knock-outs in concrete-tight box, dry or damp location applications. used on steel EMT Conduits

Materials :

Steel

Standards :

UL 514B
CSA C22.2 No. 18

Certification:

UL/CUL

Part No.	Size
RTCC-050	1/2"
RTCC-075	3/4"
RTCC-100	1"
RTCC-125	1-1/4"
RTCC-150	1-1/2"
RTCC-200	2"
RTCC-250	2-1/2"
RTCC-300	3"
RTCC-350	3-1/2"
RTCC-400	4"



Rain Tight Compression Coupling

Use:

Compression type couplings are used to join lengths of steel EMT conduit for concrete-tight, dry or damp location applications.

use on steel EMT Conduits.

Concrete-Tight

Materials :

Steel

Standards :

UL 514B
CSA C22.2 No. 18

Certification:

UL/CUL

Part No.	Size
RTCP-050	1/2"
RTCP-075	3/4"
RTCP-100	1"
RTCP-125	1-1/4"
RTCP-150	1-1/2"
RTCP-200	2"
RTCP-250	2-1/2"
RTCP-300	3"
RTCP-350	3-1/2"
RTCP-400	4"



Steel Rigid Connector

Use:

Compression type connectors are used to join two lengths of threadless Rigid or IMC Conduit.

Concrete-Tight

Materials :

Steel

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

Part No.	Size
SCCON-050	1/2"
SCCON-075	3/4"
SCCON-100	1"
SCCON-125	1-1/4"
SCCON-150	1-1/2"
SCCON-200	2"
SCCON-250	2-1/2"
SCCON-300	3"
SCCON-350	3-1/2"
SCCON-400	4"



Steel Rigid Coupling

Use:

Compression type couplings are used to join two lengths of threadless Rigid or IMC Conduit.

Concrete-Tight

Materials :

Steel

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

Part No.	Size
SCCOP-050	1/2"
SCCOP-075	3/4"
SCCOP-100	1"
SCCOP-125	1-1/4"
SCCOP-150	1-1/2"
SCCOP-200	2"
SCCOP-250	2-1/2"
SCCOP-300	3"
SCCOP-350	3-1/2"
SCCOP-400	4"

Zinc Die Cast Fittings



Materials:
Zinc Die-Cast
Standards :
UL

Rigid to Rigid Pull Elbow

Part No.	Size
ZRR-50	1/2"
ZRR-75	3/4"
ZRR-100	1"
ZRR-125	1-1/4"
ZRR-150	1-1/2"
ZRR-200	2"



Materials:
Zinc Die-Cast
Standards :
UL

Rigid to Box Pull Elbow

Part No.	Size
ZRB-50	1/2"
ZRB-75	3/4"
ZRB-100	1"
ZRB-125	1-1/4"
ZRB-150	1-1/2"
ZRB-200	2"



Materials:
Zinc Die-Cast
Standards :
UL

EMT to EMT Pull Elbow

Part No.	Size
EPE-050	1/2"
EPE-075	3/4"
EPE-100	1"
EPE-125	1-1/4"
EPE-150	1-1/2"
EPE-200	2"



Materials:
Zinc Die-Cast
Standards :
UL

EMT to Box Pull Elbow

Part No.	Size
EPB-050	1/2"
EPB-075	3/4"
EPB-100	1"
EPB-125	1-1/4"
EPB-150	1-1/2"
EPB-200	2"

EMT to Pull Elbow
EMT To RMC Combination



Materials:
Zinc Die-Cast
Standards :
UL

Part No.	Size
EPR-050	1/2"
EPR-075	3/4"
EPR-100	1"
EPR-125	1-1/4"
EPR-150	1-1/2"
EPR-200	2"

Zinc Die Cast Fittings



Materials:
Zinc Die-Cast
Standards :
UL

Offset Connector

Part No.	Size
OFC-050	1/2"
OFC-075	3/4"
OFC-100	1"
OFC-125	1-1/4"
OFC-150	1-1/2"
OFC-200	2"



Materials:
Zinc Die-Cast
Standards :
UL

EMT to Box offset connector

Part No.	Size
EBOC-50	1/2"
EBOC-75	3/4"
EBOC-100	1"



Materials:
Zinc Die-Cast
Standards :
UL

EMT to Box Compression Connector

Part No.	Size
EX-50	1/2"
EX-75	3/4"
EX-100	1"



Inside Corner Pull Elbows

Part No.	Size
EBC-50	1/2"
EBC-75	3/4"

Use:

Pull elbows are used to facilitate pulling conductors through a 90° bend in a run of steel RIGID / EMT Conduit. The removable cover gives ample access so that wire pulling can be achieved without any obstruction.

- Set Screw Type
- Removable Aluminum Cover

Materials: Zinc Die-Cast

Standards : UL 514B
CSA C22.2 No. 18

Certification: UL/CUL

Conduit Strap



Use:

One hole straps are used for providing support for steel EMT Conduit as required by the National Electrical Code.

Click-On Type

Materials :

Stamped Steel

Finish :

Zinc Plated

Standards:

UL2239/CSA C22.2 No. 18

Certification:

UL/CUL

Steel EMT One Hole Straps

Part No.	Size
ES050-1	1/2"
ES075-1	3/4"
ES100-1	1"
ES125-1	1-1/4"
ES150-1	1-1/2"
ES200-1	2"
ES250-1	2-1/2"
ES300-1	3"
ES350-1	3-1/2"
ES400-1	4"



Use:

Used for providing support for steel EMT Conduit where higher load bearing supports are desired as required by the National Electrical Code.

Click-On Type

Materials :

Stamped Steel

Finish :

Zinc Plated

Standards :

UL 2239/CSA C22.2 No. 18

Certification:

UL/CUL

Steel EMT Two Hole Straps

Part No.	Size
ES050-2	1/2"
ES075-2	3/4"
ES100-2	1"
ES125-2	1-1/4"
ES150-2	1-1/2"
ES200-2	2"
ES250-2	2-1/2"
ES300-2	3"
ES350-2	3-1/2"
ES400-2	4"