



Galvanized Steel Flexible Conduit

Products:

We provide a comprehensive range of Galvanized Steel Flexible Conduit, which is designed in order to provide mechanical strength and higher flexibility. These helically wound flexible conduits in galvanized steel are appreciated for features such as corrosion resistance, durability, and high functional life. We offer these conduits in natural as well as in zinc finish.

Features:

- High mechanical strength
- Highly flexible
- Temperature range: -100°C to +300°C
- IP rating: IP40 with standard fittings
- Inherent low fire hazard product

Specification :

| Part No. | Size | Internal Diameter (mm) | External Diameter (mm) | Min. Bend Radius (mm) | Coil Packing (m) |
|----------|------|------------------------|------------------------|-----------------------|------------------|
| GFC-201 | 3/8" | 10 | 13 | 30 | 50 |
| GFC-202 | 5/8" | 16 | 19 | 30 | 50 |
| GFC-203 | 1/2" | 13 | 17 | 43 | 50 |
| GFC-204 | 3/4" | 19 | 23 | 50 | 50 |
| GFC-205 | 1 | 25 | 29 | 57 | 50 |
| GFC-206 | 1¼" | 32 | 36 | 70 | 50 |
| GFC-207 | 1½" | 38 | 43 | 80 | 25 |
| GFC-208 | 2" | 50 | 55 | 95 | 25 |
| GFC-209 | 2½" | 63 | 70 | 140 | 15 |
| GFC-210 | 3" | 78 | 85 | 150 | 10 |
| GFC-211 | 4" | 101 | 109 | 190 | 10 |

Flexible Conduits



Green Field Flexible Conduit

Use:

Greenfield Flexible Conduit using hot dipped galvanized steel strips of heavy thickness. These are made using helical winding of cold rolled annealed pinch passed hot dipped galvanized steel strip. Fabricated in round lock construction, Greenfield Flexible Conduit is used where high corrosion resistance and long life for the conduit is required.

Features :

- Highly resistant to corrosion
- Long service life
- Good mechanical protection
- Medium bending flexibility
- Inherent low fire hazard
- Resistant to high temperature +300°C
- Operate efficiently in broad temperature range
- Can bear strong tension

Specification

| Part No. | Size | I.D. (MM) | O.D. (MM) | COIL LENGTH (M) |
|----------|--------|-----------|-----------|-----------------|
| GFC-301 | 1/2" | 16.5 | 22 | 30 |
| GFC-302 | 3/4" | 20.5 | 26 | 30 |
| GFC-303 | 1" | 25.5 | 33 | 30 |
| GFC-304 | 1-1/4" | 32 | 39.5 | 15 |
| GFC-305 | 1-1/2" | 38 | 47 | 15 |
| GFC-306 | 2" | 51 | 60 | 15 |
| GFC-307 | 2-1/2" | 63 | 70 | 10 |
| GFC-308 | 3" | 76 | 82 | 10 |
| GFC-309 | 3-1/2" | 90 | 98 | 10 |
| GFC-310 | 4" | 100 | 108 | 10 |



PVC Coated Steel Flexible Conduit

Use:

We are engaged in manufacturing and exporting a quality range of PVC Coated Steel Flexible Conduit. Our conduits are used for mechanical protection of cable and wire in tunnels, hospitals, high-rise office blocks and public buildings, airlines, underground and others. Further, these are PVC coated in order to ensure resistance against corrosion. These steel flexible conduits are most suitable for tight-spot installation and in places where certain water tightness is required. Galvanized steel, helical wound, flexible steel conduit is available in poly vinyl coating in black color with spiral corrugated pattern finished surface.

Technical data:

IP rating: IP54 with standard fittings
 IP65 with type C compression fittings
 Halogen, sulphur and phosphorus free
 Temperature range: -25°C to +90°C
 Nickel plated brass fittings

Specification :

| Part No. | Size | Internal Diameter | External Diameter | Min. Bend Radius | Coil Packing |
|----------|------|-------------------|-------------------|------------------|--------------|
| | | Min. / Max. | Min. / Max. | | |
| | | (mm) | (mm) | (mm) | (m) |
| GFC-401 | 3/8" | 12.3/12.8 | 16.7/17.2 | 36 | 50 |
| GFC-402 | 1/2" | 15.8/16.3 | 20.2/20.7 | 50 | 50 |
| GFC-403 | 3/4" | 20.7/21.2 | 25.5/26.1 | 55 | 50 |
| GFC-404 | 1" | 26.4/26.8 | 31.6/32.2 | 65 | 50 |
| GFC-405 | 1¼" | 35.05/35.4 | 40.8/41.5 | 75 | 50 |
| GFC-406 | 1½" | 40.0/40.6 | 46.6/47.2 | 86 | 25 |
| GFC-407 | 2" | 51.3/51.9 | 58.1/58.7 | 105 | 25 |
| GFC-408 | 2½" | 63.0/63.6 | 71.8/72.4 | 160 | 15 |
| GFC-409 | 3" | 78.0/78.7 | 87.2/87.9 | 180 | 10 |
| GFC-410 | 4" | 101.6/102.6 | 111.2/112.3 | 210 | 10 |

Flexible Conduits



Metal Clad Armor Cable MC (BX)

Application:

Type MC cables are suitable for use as follows: branch, feeder and service power distribution in commercial, industrial, institutional, and multi-residential buildings. Power, lighting, control, and signal circuits. Type THHN/THWN conductors are rated 90°C dry / 75°C wet. They are permitted for 600V application.

Conductors: Soft annealed copper .


Sizes: 14AWG-1000kcmil.

Insulation: Flame retardant PVC.

Thickness: per UL83.

| Part No. | Size | Strands No./OD | PVC insulation Thickness | Nylon Jacket Thickness | AL interlocked Tape thickness | Approx. O.D | Max.DC Resistance | Approx. Weight |
|----------|-----------|----------------|--------------------------|------------------------|-------------------------------|-------------|-------------------|----------------|
| | AWG | | | | | | | |
| CA-142 | 14/2+14/1 | 1/1.63 | 0.38 | 0.2 | 0.5 | 11.6 | 8.45 | 141.54 |
| CA-143 | 14/3+14/1 | 1/1.63 | 0.38 | 0.2 | 0.5 | 12.3 | 8.45 | 170.75 |
| CA-144 | 14/4+14/1 | 1/1.63 | 0.38 | 0.2 | 0.5 | 13.1 | 8.45 | 200.36 |
| CA-122 | 12/2+12/1 | 1/2.05 | 0.38 | 0.2 | 0.5 | 11.9 | 5.31 | 191.7 |
| CA-123 | 12/3+12/1 | 1/2.05 | 0.38 | 0.2 | 0.5 | 12.7 | 5.31 | 234.4 |
| CA-124 | 12/4+12/1 | 1/2.05 | 0.38 | 0.2 | 0.5 | 13.6 | 5.31 | 277.7 |
| CA-102 | 10/2+10/1 | 1/2.59 | 0.51 | 0.2 | 0.5 | 13.6 | 3.34 | 268.7 |
| CA-103 | 10/3+10/1 | 1/2.59 | 0.51 | 0.2 | 0.5 | 14.7 | 3.34 | 334.4 |
| CA-104 | 10/4+10/1 | 1/2.59 | 0.51 | 0.2 | 0.5 | 15.8 | 3.34 | 401.1 |
| CA-82 | 8/2+10/1 | 7/1.24 7/0.98 | 0.76 0.51 | 0.22 0.2 | 0.5 | 17.1 | 2.14 3.34 | 364.6 |
| CA-83 | 8/3+10/1 | 7/1.24 7/0.98 | 0.76 0.51 | 0.22 0.2 | 0.5 | 17.9 | 2.14 3.34 | 476 |
| CA-84 | 8/4+10/1 | 7/1.24 7/0.98 | 0.76 0.51 | 0.22 0.2 | 0.6 | 19.1 | 2.14 3.34 | 607.6 |
| CA-62 | 6/2+10/1 | 7/1.56 7/1.24 | 0.76 0.76 | 0.22 0.22 | 0.6 | 18.9 | 1.35 2.14 | 521.5 |
| CA-63 | 6/3+10/1 | 7/1.56 7/1.24 | 0.76 0.76 | 0.22 0.22 | 0.6 | 19.9 | 1.35 2.14 | 700.5 |
| CA-64 | 6/4+10/1 | 7/1.56 7/1.24 | 0.76 0.76 | 0.22 0.22 | 0.6 | 21.9 | 1.35 2.14 | 863.3 |
| CA-42 | 4/2+8/1 | 7/1.96 7/1.24 | 1.02/0.76 | 0.22 | 0.6 | 24.3 | 0.85 2.14 | 723 |
| CA-43 | 4/3+8/1 | 7/1.96 7/1.24 | 1.02/0.76 | 0.22 | 0.6 | 27.5 | 0.85 2.14 | 1023.8 |
| CA-44 | 4/4+8/1 | 7/1.96 7/1.24 | 1.02/0.76 | 0.22 | 0.6 | 28.9 | 0.85 2.14 | 1284.5 |
| CA-32 | 3/2+6/1 | 7/2.2 7/1.56 | 1.02/0.76 | 0.22 | 0.6 | 25.7 | 0.673 1.35 | 944.6 |
| CA-33 | 3/3+6/1 | 7/2.2 7/1.56 | 1.02/0.76 | 0.22 | 0.6 | 28 | 0.673 1.35 | 1258.4 |
| CA-34 | 3/4+6/1 | 7/2.2 7/1.56 | 1.02/0.76 | 0.22 | 0.6 | 30.6 | 0.53 1.35 | 1575.8 |
| CA-22 | 2/2+6/1 | 7/2.47 7/1.56 | 1.02/0.76 | 0.22 | 0.6 | 27.5 | 0.53 1.35 | 1097.8 |

Conduit Whip

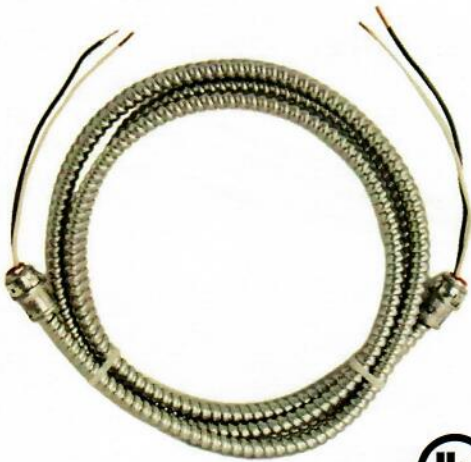

Flexible Metal Pre-Assembled Whips

Used for lighting fixture installations as well as many other electrical equipment uses. These metallic whips consist of UL listed flexible metal conduit Type BR, stranded (stock) or solid THHN wire with 6" leads, and internal, zinc die-cast fittings with steel locknuts.

Construction:

Hot Dipped Galvanized Steel
Helically wound, formed strip
Reduced Wall Steel Gauge

| Part No | Size (Inch) | Length (Inch) | Wire Gauge & Configuration | |
|---------|-------------|---------------|----------------------------|------------|
| MW10122 | 3/8" | 72" | 12/2 | BLK-WT |
| MW10123 | 3/8" | 72" | 12/3 | BLK-WT-GRN |
| MW10142 | 3/8" | 72" | 14/2 | BLK-WT |
| MW10143 | 3/8" | 72" | 14/3 | BLK-WT-GRN |
| MW10144 | 3/8" | 72" | 14/4 | BLK-WT-RED |
| MW10182 | 3/8" | 72" | 18/2 | BLK-WT |
| MW10183 | 3/8" | 72" | 18/3 | BLK-WT-GRN |

Zinc Die Cast Fittings



Saddle Combination Connector

Use:

Saddle combination connectors are used to terminate armored and metal clad cables to a 1/2" knock-out in a dry location box or enclosure.

Materials :

Zinc Die-Cast

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

| Part No. | Size |
|----------|------|
| SDC-038 | 3/8" |



Duplex Connector

Use:

Duplex connectors are used to terminate two runs of Armored Cable, Metal Clad Cable or Flexible metal Conduit to a 1/2" knock-out in a dry location.

Materials :

Zinc Die-Cast

Standards :

UL 514B

CSA C22.2 No. 18

Certification:

UL/CUL

| Part No. | Size |
|----------|------|
| MCD-038 | 3/8" |



One screw Duplex Connector

Use:

Flex-MC connectors are used to terminate two runs of Armored Cable, Metal Clad Cable or Flexible metal Conduit to a 1/2" knock-out in a dry location.

Materials :

Zinc Die-Cast

Standards :

UL 514B


CSA C22.2 No. 18

Certification:

UL/CUL

| Part No. | Size |
|----------|------|
| ODC-38 | 3/8" |

Zinc Die Cast Fittings



Use:

Clamp type Duplex connectors are used to terminate two runs of Armored Cable, Metal Clad Cable or Flexible metal Conduit to a 1/2" knock-out in a dry location.

Materials :Zinc Die-Cast


Standards :UL 514B

CSA C22.2 No. 18

Certification:UL/CUL

Clamp Duplex Connector

| Part No. | Size |
|----------|------|
| CDC-38 | 3/8" |



Use:

Clamp type Duplex connectors are used to terminate two runs of Armored Cable, Metal Clad Cable or Flexible metal Conduit to a 1/2" knock-out in a dry location.

Materials :Zinc Die-Cast

Standards :UL 514B

CSA C22.2 No. 18

Certification:UL/CUL

Two screw Duplex Connector

| Part No. | Size |
|----------|------|
| TDC-38 | 3/8" |



Use:

Duplex connectors are used to terminate two runs of armored cable, metal clad cable or flexible metal Conduit to a 1/2" knock-out in a dry location.

Materials :Zinc Die-Cast

Standards :UL 514B

CSA C22.2 No. 18

Certification:UL/CUL

Single BX Connector

| Part No. | Size |
|----------|------|
| BXC-038 | 3/8" |



Use:

Combination couplings are used to provide a transition from steel EMT conduit to Flexible Metal Conduit.

Set Screw Type

Materials :Zinc Die-Cast

Standards :UL 514B

CSA C22.2 No. 18

Certification:UL/CUL

Combination Couplings (EMT to flexible conduit)

| Part No. | Size |
|----------|------|
| CMB-050 | 1/2" |
| CMB-075 | 3/4" |
| CMB-100 | 1" |



Zinc Die Cast Fittings



Materials:
Zinc die cast
Standards :
UL 514B

Box Spacer

| Part No. | Size |
|----------|------|
| ZBC-50 | 1/2" |
| ZBC-75 | 3/4" |



Materials:
Zinc Die-Cast
Standards :
UL

Saddle Cable Connector

| Part No. | Size |
|----------|------|
| RXCC-038 | 3/8" |



Use:
Clamp type connectors are used to terminate Metal Clad Cable or Flexible Metal Conduit to a 1/2" knock-out in a dry box or enclosure.
UL Listed Locknut
Male Hub Threads NPS
End Stopped
Standards:
UL 514B
CSA C22.2 No. 18
Certification:
UL/CUL

Romex Clamp Connector

| Part No. | Size |
|----------|--------|
| RCON-038 | 3/8" |
| RCON-050 | 1/2" |
| RCON-075 | 3/4" |
| RCON-100 | 1" |
| RCON-125 | 1-1/4" |
| RCON-150 | 1-1/2" |
| RCON-200 | 2" |

Zinc Die Cast Fittings



Use:

used to terminate Flexible Metal Conduit to a knock-out in a dry location box or enclosure.

Materials :

Zinc Die-Cast

Standards :

UL 514B

CSA C22.2 No. 18

Squeeze Connectors-straight

| Part No. | Size |
|----------|--------|
| SSQ-038 | 3/8" |
| SSQ-050 | 1/2" |
| SSQ-075 | 3/4" |
| SSQ-100 | 1" |
| SSQ-125 | 1-1/4" |
| SSQ-150 | 1-1/2" |
| SSQ-200 | 2" |
| SSQ-250 | 2-1/2" |
| SSQ-300 | 3" |
| SSQ-400 | 4" |



Use:

Used to make a 90° termination of Armored Cable, Metal Clad Cable or Flexible, Metal Conduit to a knock-out or unthreaded slip hole in a dry location box or enclosure.

Materials : Zinc Die-Cast

Standards : UL 514B

CSA C22.2 No. 18

Squeeze Connector-90 Deg

| Part No. | Size |
|----------|--------|
| ASQ-038 | 3/8" |
| ASQ-050 | 1/2" |
| ASQ-075 | 3/4" |
| ASQ-100 | 1" |
| ASQ-125 | 1-1/4" |
| ASQ-150 | 1-1/2" |
| ASQ-200 | 2" |
| ASQ-250 | 2-1/2" |
| ASQ-300 | 3" |
| ASQ-400 | 4" |



Materials :

Zinc Die-Cast

Standards :

UL 514B

CSA C22.2 No. 18

EMT to flex coupling

| Part No. | Size |
|----------|------|
| EFC-050 | 1/2" |

Zinc Die Cast Fittings



Materials :
Zinc Die-Cast
Standards :
UL 514B
CSA C22.2 No. 18

Strap Connector

| Part No. | Size |
|----------|------|
| SP-050 | 1/2" |



Materials :
Zinc Die-Cast
Standards :
UL 514B
CSA C22.2 No. 18

BX Flex Connector

| Part No. | Size |
|----------|------|
| BFC-050 | 1/2" |



Use:
Screw-in type connectors are used to terminate Flexible Metal Conduit to a knock-out in a dry location box or enclosure, where minimum spacing is desired between the conduits.
Materials:Zinc Die-Cast
Standards :UL 514B
CSA C22.2 No. 18
Certification:UL/CUL

Flex Connector

| Part No. | Size |
|----------|--------|
| ZFC-050 | 1/2" |
| ZFC-075 | 3/4" |
| ZFC-100 | 1" |
| ZFC-125 | 1-1/4" |
| ZFC-150 | 1-1/2" |
| ZFC-200 | 2" |



Use:
Screw-in type couplings are used to join lengths of Flexible Metal Conduit.
Materials:Zinc Die-Cast
Standards :UL 514B
CSA C22.2 No. 18
Certification:UL/CUL

Screw In Coupling

| Part No. | Size |
|----------|--------|
| FSC-050A | 1/2" |
| FSC-075A | 3/4" |
| FSC-100A | 1" |
| FSC-125A | 1-1/4" |
| FSC-150A | 1-1/2" |
| FSC-200A | 2" |



Use:
Combination couplings are used to join lengths of Flexible Metal Conduit.
Materials:Zinc Die-Cast
Standards :UL 514B
CSA C22.2 No. 18
Certification:UL/CUL

EMT To Flex Combination Coupling

| Part No. | Size |
|----------|------|
| EFCP-50 | 1/2" |
| EFCP-75 | 3/4" |
| EFCP-100 | 1" |

Zinc Die Cast Fittings



Materials :
Zinc Die-Cast
Standards :
UL 514B
CSA C22.2 No. 18

Strap Connector

| Part No. | Size |
|----------|------|
| SP-050 | 1/2" |



Materials :
Zinc Die-Cast
Standards :
UL 514B
CSA C22.2 No. 18

BX Flex Connector

| Part No. | Size |
|----------|------|
| BFC-050 | 1/2" |



Use:
Screw-in type connectors are used to terminate Flexible Metal Conduit to a knock-out in a dry location box or enclosure, where minimum spacing is desired between the conduits.
Materials:Zinc Die-Cast
Standards :UL 514B
CSA C22.2 No. 18
Certification:UL/CUL

Flex Connector

| Part No. | Size |
|----------|--------|
| ZFC-050 | 1/2" |
| ZFC-075 | 3/4" |
| ZFC-100 | 1" |
| ZFC-125 | 1-1/4" |
| ZFC-150 | 1-1/2" |
| ZFC-200 | 2" |



Use:
Screw-in type couplings are used to join lengths of Flexible Metal Conduit.
Materials:Zinc Die-Cast
Standards :UL 514B
CSA C22.2 No. 18
Certification:UL/CUL

Screw In Coupling

| Part No. | Size |
|----------|--------|
| FSC-050A | 1/2" |
| FSC-075A | 3/4" |
| FSC-100A | 1" |
| FSC-125A | 1-1/4" |
| FSC-150A | 1-1/2" |
| FSC-200A | 2" |



Use:
Combination couplings are used to join lengths of Flexible Metal Conduit.
Materials:Zinc Die-Cast
Standards :UL 514B
CSA C22.2 No. 18
Certification:UL/CUL

EMT To Flex Combination Coupling

| Part No. | Size |
|----------|------|
| EFCP-50 | 1/2" |
| EFCP-75 | 3/4" |
| EFCP-100 | 1" |

Zinc Die Cast Fittings



Use:

Used to terminate Flexible Metal Conduit to a knock-out in a dry location box or enclosure.

Material:Zinc Die Cast

Standards :UL 514B

CSA C22.2 No. 18

Certification:UL/CUL

Inner Tooth Pipe Connector

| Part No. | Size |
|----------|--------|
| NPN-38 | 3/8" |
| NPN-50 | 1/2" |
| NPN-75 | 3/4" |
| NPN-100 | 1" |
| NPN-125 | 1-1/4" |
| NPN-150 | 1-1/2" |
| NPN-200 | 2" |
| NPN-250 | 2-1/2" |
| NPN-300 | 3" |
| NPN-350 | 3-1/2" |
| NPN-400 | 4" |



Use:

Used to terminate Flexible Metal Conduit to a knock-out in a dry location box or enclosure.

Material:Zinc Die Cast

Standards :UL 514B

CSA C22.2 No. 18

Certification:UL/CUL

Waterproof Box Connector

| Part No. | Size |
|----------|--------|
| DPJ-38 | 3/8" |
| DPJ-50 | 1/2" |
| DPJ-75 | 3/4" |
| DPJ-100 | 1" |
| DPJ-125 | 1-1/4" |
| DPJ-150 | 1-1/2" |
| DPJ-200 | 2" |
| DPJ-250 | 2-1/2" |
| DPJ-300 | 3" |
| DPJ-350 | 3-1/2" |
| DPJ-400 | 4" |



Use:

Used to terminate Flexible Metal Conduit to a knock-out in a dry location box or enclosure.

Material:Zinc Die Cast

Standards :UL 514B

CSA C22.2 No. 18

Certification:UL/CUL

Zinc Bent of Head (90 degree & 45 degree)

| Part No. | Size | Part No. | Size |
|-----------|--------|-----------|--------|
| DWJ90-38 | 3/8" | DWJ45-38 | 3/8" |
| DWJ90-50 | 1/2" | DWJ45-50 | 1/2" |
| DWJ90-75 | 3/4" | DWJ45-75 | 3/4" |
| DWJ90-100 | 1" | DWJ45-100 | 1" |
| DWJ90-125 | 1-1/4" | DWJ45-125 | 1-1/4" |
| DWJ90-150 | 1-1/2" | DWJ45-150 | 1-1/2" |
| DWJ90-200 | 2" | DWJ45-200 | 2" |
| DWJ90-250 | 2-1/2" | DWJ45-250 | 2-1/2" |
| DWJ90-300 | 3" | DWJ45-300 | 3" |
| DWJ90-350 | 3-1/2" | DWJ45-350 | 3-1/2" |
| DWJ90-400 | 4" | DWJ45-400 | 4" |

Steel Fittings



Bx-flex, NM and MC cable connectors

Use:

CBC-50 and CBC-52:
3/8" trade size steel and aluminum RW Flexible Metal Conduit.
0.450" - 0.535" diameter Type MC cable interlocked armor with or without overall PVC extrusion, Type AC, HCF, and Flexible Metal Conduit.
Fits sizes 14/2 - 10/3 steel armored cable.
Fits sizes 14/2 - 12/4 aluminum armored cable.

Use:

CBC-75 and CBC-5075: 1/2" trade size steel and aluminum RW FSC
0.570" - 0.795" diameter MC cable
Fits sizes 10/4, 10/5, 8/3, 8/4, 6/3 armored cable

Standards :

UL listed for grounding 600V or less.
UL Listed concrete tight when taped.
UL Standard 514B

Certification:

UL/CUL

| Part No. | Size |
|----------|------------|
| CBC-50 | 1/2" |
| CBC-52 | 1/2"duplex |
| CBC-75 | 3/4" |

Fast Cable Connectors

Fast Cable connectors are designed for safe and fast installations of flex, MC, AC, and HCF cable – and cover the widest cable ranges in the industry. They save time too – about 17 seconds per fitting. Just snap the fitting onto the cable, then into the electrical box. No tools are required for the installation. For easier insertion of larger cables or for overlapping cable ranges, use the larger 40AST or 50AST fittings. Easy to remove with a screwdriver – Just lift the ring and twist off.



| Part No. | Size | Cable Type | Cable Range |
|----------|------|---|--|
| FCC-038 | 3/8" | MC/HCF Cable Steel and Aluminum | 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 |
| | | MC Cable Continuous Corrugated Aluminum | 14/4, 12/2, 12/3, 12/4, 10/2 |

Conduit Union



Male



Female

Material:

Galvanized steel

Standards:UL

| Part No. | Part No. | Size |
|----------|----------|--------|
| MCU-050 | FMCU-050 | 1/2" |
| MCU-075 | FMCU-075 | 3/4" |
| MCU-100 | FMCU-100 | 1" |
| MCU-125 | FMCU-125 | 1-1/4" |
| MCU-150 | FMCU-150 | 1-1/2" |
| MCU-200 | FMCU-200 | 2" |
| MCU-250 | FMCU-250 | 2-1/2" |
| MCU-300 | FMCU-300 | 3" |
| MCU-400 | FMCU-400 | 4" |

Malleable Iron Fittings



Squeeze connectors
with insulated throats

| Part No. | Size |
|----------|--------|
| MSCI-038 | 3/8" |
| MSCI-050 | 1/2" |
| MSCI-075 | 3/4" |
| MSCI-100 | 1 " |
| MSCI-125 | 1-1/4" |
| MSCI-150 | 1-1/2" |
| MSCI-200 | 2 " |
| MSCI-250 | 2-1/2" |
| MSCI-300 | 3 " |
| MSCI-350 | 3-1/2" |
| MSCI-400 | 4 " |



90° Squeeze connectors
with insulated throats

| Part No. | Size |
|-----------|--------|
| MSCI-9038 | 3/8" |
| MSCI-9050 | 1/2" |
| MSCI-9075 | 3/4" |
| MSCI-9100 | 1 " |
| MSCI-9125 | 1-1/4" |
| MSCI-9150 | 1-1/2" |
| MSCI-9200 | 2 " |
| MSCI-9250 | 2-1/2" |
| MSCI-9300 | 3 " |
| MSCI-9350 | 3-1/2" |
| MSCI-9400 | 4 " |



45° Squeeze connectors
with insulated throats

| Part No. | Size |
|-----------|--------|
| MSCI-4038 | 3/8" |
| MSCI-4050 | 1/2" |
| MSCI-4075 | 3/4" |
| MSCI-4100 | 1 " |
| MSCI-4125 | 1-1/4" |
| MSCI-4150 | 1-1/2" |
| MSCI-4200 | 2 " |
| MSCI-4250 | 2-1/2" |
| MSCI-4300 | 3 " |
| MSCI-4350 | 3-1/2" |
| MSCI-4400 | 4" |

Use:

For armored cable, MC/MCIA/HCF flexible metal conduit, interlocked metal clad cables.

Male hub threads - NPSM

Materials:

- Malleable iron
- Steel locknut
- Stamped steel covers

Standard Finish:

- Zinc plated
- 2-1/2" to 4" zinc plated & painted

Conduit Strap



Use:

Wire Sizes 14, 12, And 10, In 2 Or 3 Conductor,
With Or Without Ground
Also 14 In Uf

Materials :

Galvanized steel

NM-Cable Strap One Hole
(one hole SEU strap)

| Part No. | Size |
|----------|-----------|
| NMS1-1 | 14/2-12/2 |
| NMS1-2 | 8/3-4/3 |
| NMS1-3 | 3/3-2/3 |
| NMS1-4 | 1-2/0 |
| NMS1-5 | 3/0-4/0 |



Use:

14-2, 14-3, 12-2, And 10-2, With Or Without Ground;
Also Uf, 14-2, 14-3, And 12-2 With Or Without Ground

Materials :

Galvanized Steel

NM-Cable Strap Two Hole
(two hole SEU strap)

| Part No. | Size |
|----------|---------|
| NMS2-1 | 8/3-4/3 |
| NMS2-2 | 3/3-2/3 |
| NMS2-3 | 1-2/0 |
| NMS2-4 | 3/0-4/0 |



Use:

½ Round Cable

Materials :

Galvanized Steel

Flex Cable Strap One Hole
(Romex and SEU strap)

| Part No. | Size |
|----------|-----------|
| FCS1 | 14/2-12/2 |

Conduit Ferrule

Steel Ferrule



Materials:Galvanized steel

| Part No. | Size |
|----------|--------|
| SF-038 | 3/8" |
| SF-050 | 1/2" |
| SF-075 | 3/4" |
| SF-100 | 1" |
| SF-125 | 1-1/4" |
| SF-150 | 1-1/2" |
| SF-200 | 2" |
| SF-250 | 2-1/2" |
| SF-300 | 3" |
| SF-350 | 3-1/2" |
| SF-400 | 4" |
| SF-500 | 5" |
| SF-600 | 6" |

Steel Gap ferrule



Materials:Galvanized steel

| Part No. | Size |
|----------|--------|
| SGF-038 | 3/8" |
| SGF-050 | 1/2" |
| SGF-075 | 3/4" |
| SGF-100 | 1" |
| SGF-125 | 1-1/4" |
| SGF-150 | 1-1/2" |
| SGF-200 | 2" |
| SGF-250 | 2-1/2" |
| SGF-300 | 3" |
| SGF-400 | 4" |